

DELKIN DEVICES®

CFast™ Embedded Flash Module

Engineering Specification

Document Number: L50025

Revision: 1.2



No part of this document may be reproduced, copied, recorded, stored in a retrieval system, or transmitted in any form without the written permission of Delkin Devices. This document is for informational use only and is subject to change without prior notice. Delkin Devices assumes no responsibility for any errors that may appear in this document.

Table of Contents

1	General Specifications	3
1.1	Interfaces	4
1.1.1	Electrical / Physical Interfaces	4
1.1.2	Controller Features	5
1.2	Part Number Availability	5
2	Electrical Specifications	7
2.1	Pin and Signal Assignments	7
2.2	Supply Voltage	8
2.3	Power Consumption	8
3	Command Descriptions	9
3.1	Supported ATA Commands	9
3.2	Identity Device Data	11
3.3	Device SMART Data	14
3.4	Mechanical Form Factor	16
3.5	Physical Dimensions	16

List of Figures

Figure 1.	CFast embedded Flash Controller Block Diagram	4
Figure 2.	Delkin CFAST embedded MODULE block diagram	5
Figure 3.	CFast Embedded Module Mechanical Description	16
Figure 4	CFast Embedded Module Mechanical Dimensions	17

List of Tables

Table 1.	Specification Summary	3
Table 2.	Delkin CFast embedded MODULE Capacities and Part Numbers	5
Table 3.	Power and signal pin-out	7
Table 4.	Supply voltage	8
Table 5.	Power Consumption	8
Table 6.	Supported ATA Commands Command Name	9
Table 7.	Device Sector Data	11
Table 8.	CFast Embedded Module Physical Dimensions	17

1 General Specifications

Delkin's CFast embedded drive combines solid state reliability with SATA connectivity for significant performance advantages over traditional hard disk drives. Manufactured to CFast form factor specifications established by the CompactFlash Association, the CFast embedded Module is suited to embedded industrial applications where space is restricted. Its shock, vibration, and temperature ratings permit application in extreme environments. The drives can achieve sustained read/write rates of up to 115/90MB/s and feature storage capacities from 4GB to 64GB.

Table 1. Specification Summary

Specification	Value
Model number	See Table 2
Capacity	SLC: 4GB – 64GB MLC: 8GB – 64GB
Interface	SATA revision 2.6, compatible with SATA 1.5Gb/s and 3.0Gb/s interface rates. Flash I/O: 3.3V for Asynchronous Flash
Form Factor	CFAST type I
Hot swappable	Yes
Environmental certifications	RoHS, WHQL, EMI, EMC, ESD, and CE/FCC
Performance	
Interface burst speed	1.5 or 3.0 Gb/s
Sustained read (512 byte)	SLC: Up to 115MB/s MLC: Up to 95MB/s
Sustained write (512 byte)	SLC: Up to 90MB/s MLC: Up to 35MB/s
Reliability/Data Integrity	
MTBF	2,000,000 power on hours
Data reliability	1 in 10 ¹⁴ bits, read
Endurance	Program / Erase cycles: <ul style="list-style-type: none"> • SLC>2,000,000 • MLC>1,000,000
Power	
Supply voltage (allowable)	3.3V ±10%
Typical current:	
Idle	170 mA
Read	210 mA
Write	260 mA
Environmental	
Storage temperature (°C)	-50 ~ 100°C
Operating temperature options (°C):	
• MLC Commercial	0 ~ 70°C

• SLC Commercial	0 ~ 70°C
• SLC Industrial	-40 ~ 85°C
Relative humidity (non-condensing)	95% under 55°C
Vibration (operating/non-operating)	20G (80 – 2000 Hz)
Shock (operating/non-operating)	1,500G/0.5 ms
Acoustic noise	0 dB
Altitude	80,000 feet max.
Physical Dimensions	
Height	3.6 mm
Width	42.8 mm
Length	36.4 mm

1.1 Interfaces

Figure 1 below provides a functional block diagram showing the interaction of CFast embedded MODULE components.

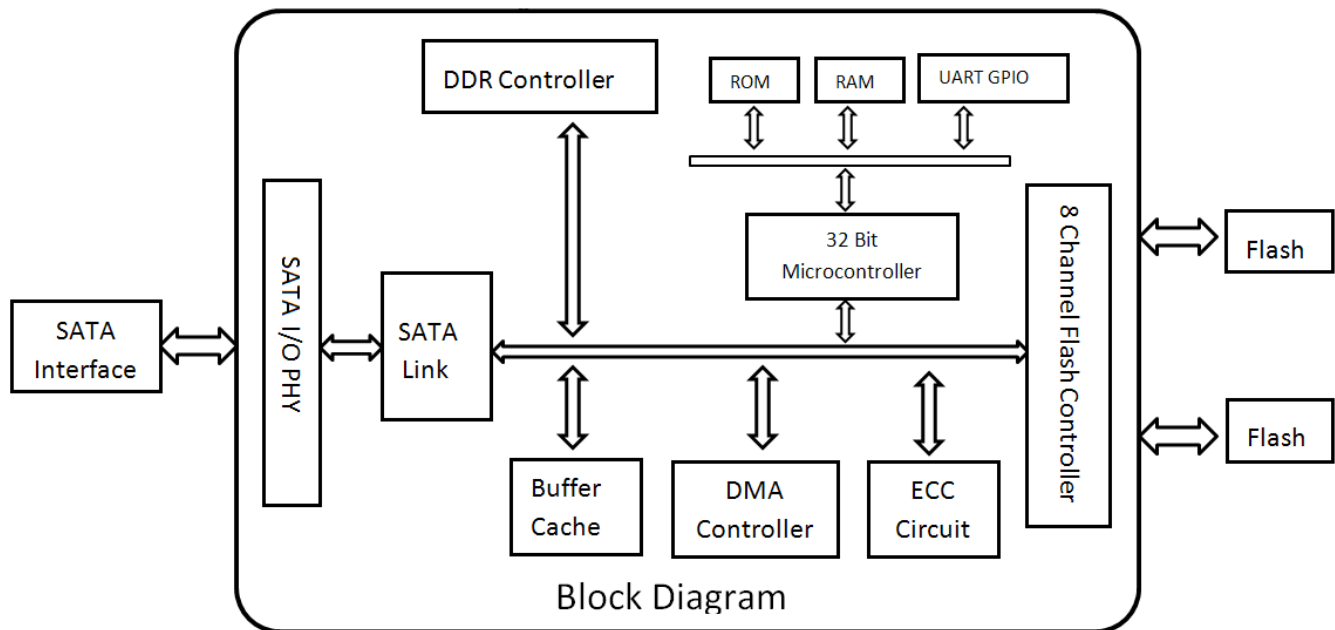


Figure 1. CFast embedded Flash Controller Block Diagram

1.1.1 Electrical / Physical Interfaces

- SATA Interface—supports SATA 1.5Gbps and 3Gbps interface
- Flash IO—Asynchronous Flash (3.3V)

1.1.2 Controller Features

- **SATA II**
 - SATA Revision 2.6 compliant
 - Compatible with SATA 1.5Gbps and 3Gbps interface
 - Power management supported
 - Support expanded register for SATA protocol 48 bits addressing mode
- **NAND flash interface**
 - Built-in hardware ECC circuit (up to 40bit/1KB)
 - Support all types of SLC and MLC Large Block 8KB/page NAND Flash
 - Flash: 4 channels bus width: 8-bit or 16-bit each channel
 - Contains 4 pieces TSOP Flash
- **Built-in 32-bit micro-controller**
 - General Purpose Input/Output (GPIO) for additional control options.

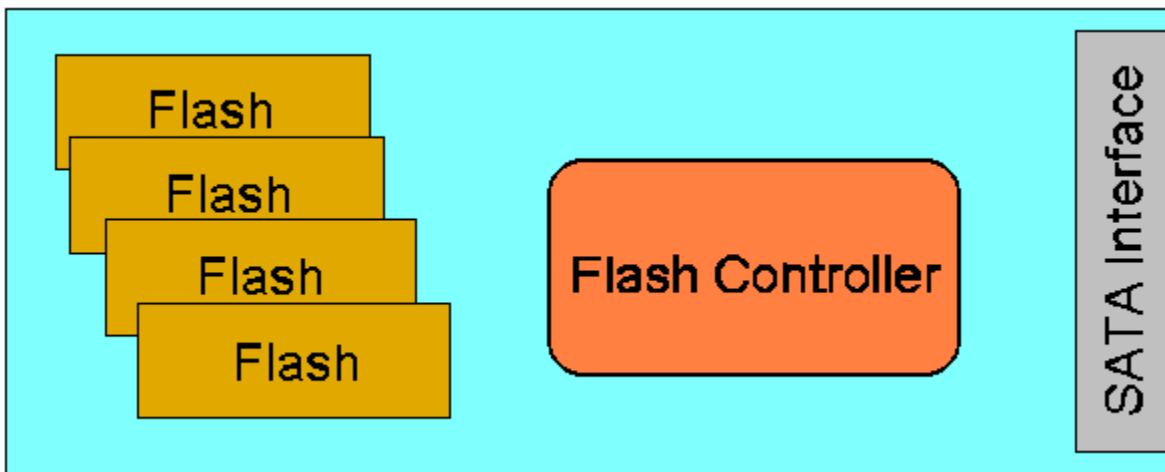


Figure 2. Delkin CFAST embedded MODULE block diagram

1.2 Part Number Availability

Delkin CFast embedded Solid State Drives are available in the capacities shown in the table below. Drives are also available that feature Delkin's Tekta™ infusion process for greater protection in extreme environments.

Table 2. Delkin CFast embedded MODULE Capacities and Part Numbers

Capacity	Product Type	Delkin Part Number
2GB	SLC Commercial (0 to 70°C)	BB02SAWTK-XN000-D
	SLC Industrial (-40 to 85°C)	BE02SAXTQ-XN000-D
4GB	SLC Commercial (0 to 70°C)	BB04SARTK-XN000-D
	SLC Industrial (-40 to 85°C)	BE04SASTQ-XN000-D
8GB	MLC Commercial (0 to 70°C)	BA08UDLTK-XN000-D
	SLC Commercial (0 to 70°C)	BB08SALTK-XN000-D
	SLC Industrial (-40 to 85°C)	BE08SAMTQ-XN000-D
16GB	MLC Commercial (0 to 70°C)	BA16LCDTK-XN000-D
	SLC Commercial (0 to 70°C)	BB16TFPTK-XN000-D
	SLC Industrial (-40 to 85°C)	BE16TFPTQ-XN000-D
32GB	MLC Commercial (0 to 70°C)	BA32NFFTK-XN000-D
	SLC Commercial (0 to 70°C)	BB32MGGTK-XN000-D
	SLC Industrial (-40 to 85°C)	BE32MGGTQ-XN000-D
64GB	MLC Commercial (0 to 70°C)	BA64LBZTK-XN000-D
	SLC Commercial (0 to 70°C)	BB64MGMTK-XN000-D
	SLC Industrial (-40 to 85°C)	BE64MGMTQ-XN000-D

2 Electrical Specifications

2.1 Pin and Signal Assignments

Table 3. Power and signal pin-out

Pin #	CFAST	Description
S1	SGND	Signal Ground
S2	A+	SATA PAIR A
S3	A-	
S4	SGND	Digital GND
S5	B-	SATA PAIR B
S6	B+	
S7	SGND	Signal Ground
Key		
Key		
PC1	CDI	Card Detect In
PC2	GND	Ground
PC3	NC	No Connect
PC4	NC	No Connect
PC5	NC	No Connect
PC6	NC	No Connect
PC7	GND	Ground
PC8	LED1	LED Output
PC9	LED2	LED Output
PC10	IO1	Reserved
PC11	IO2	Reserved
PC112	IO3	Reserved
PC13	3.3V	Power
PC14	3.3V	Power
PC15	GND	Ground

Pin #	CFAST	Description
PC16	GND	Ground
PC17	CDO	Card Detect Out

2.2 Supply Voltage

Table 4. Supply voltage

Parameter	Rating
Operating Voltage	3.3V

2.3 Power Consumption

Table 5. Power Consumption

Parameter	Value (mA)
Idle	170
Read	210
Write	260

Note: Values based on 32GB (64Gbit MLC x4) statistics.

3 Command Descriptions

3.1 Supported ATA Commands

The commands listed in the following table are supported by the CFast embedded MODULE.

Table 6. Supported ATA Commands Command Name	Command Code (Hex)	Command Name	Command Code (Hex)
General Feature Set			
Execute Drive Diagnostic	90h	Flush Cache	E7h
Identify Device	ECh	Read DMA	C8h
Read Multiple	C4h	Read Sector(s)	20h
Read Verify Sector(s)	40h	Set Feature	EFh
Set Multiple Mode	CAh	Write Multiple	C5h
Write Sector(s)	30h	NOP	00h
Read Buffer	E4h	Write Buffer	E8h
Power Management			
Check Power Mode	E5h or 98h	Idle	E3h or 97h
Sleep	E6h or 99h	Standby	E2h or 96h
Standby Immediate	E0h or 94h		
Security			
Security Set Password	F1h	Security Unlock	F2h
Security Erase Prepare	F3h	Security Erase Unit	F4h
Security Freeze Lock	F5h	Security Disable Password	F6h
SMART Feature Set			
SMART Disable Operations	B0h	SMART Enable/Disable Autosave	B0h
30 SMART Enable Operations	B0h	SMART Return Status	B0h
SMART Execute Off-Line Immediate	B0h	SMART Read Data	B0h
Host Protected Area			
Read Native Max Address	F8h	Set Max Address	F9h
Set Max Set Password	F9h	Set Max Lock	F9h
Set Max Freeze Lock	F9h	Set Max Unlock	F9h

48-Bit address Feature Set			
Flush Cache Ext	Eah	Read Sector(s) Ext	24h
Read DMA Ext	25h	Read Multiple Ext	29h
Read Native Max Address Ext	27h	Read Verify Sector(s) Ext	42h
Set Max Address Ext	37h	Write DMA Ext	35h
Write DMA FUA Ext	3Dh	Write Multiple Ext	39h
Write Multiple FUA Ext	CEh	Write Sector(s) Ext	34h
SMART Feature Register Values			
Read Data	D5h	Read Attribute Threshold	D6h
Enable/Disable Autosave	D8h	Save Attribute Values	D9h
Execute OFF-line Immediate	DAh		

3.2 Identity Device Data

The following table details the sector data returned by the IDENTIFY DEVICE command.

Table 7. Device Sector Data

Word	F: Fixed V: Variable X: Both	Default Value	Description
0	F	045Ah	General configuration bit-significant information
1	X	3FFFh	Obsolete - Number of logical cylinders(16383)
2	V	0000h	Specific configuration
3	X	0010h	Obsolete - Number of logical heads (16)
4-5	X	02007E00h	Retired
6	X	003Fh	Obsolete - Number of logical sectors per logical track (63)
7-8	V	0h	Reserved for assignment by the Compact Flash Association
9	X	0h	Retired
10-19	F	Varies	Serial number (20 ASCII characters)
20-21	X	0h	Retired
22	X	0h	Obsolete
23-26	F	Varies	Firmware revision (8 ASCII characters)
27-46	F	Varies	Model number (xxxxxxx)
47	F	8001h	7:0 - Maximum number of sectors transferred per interrupt on MULTIPLE commands.
48	F	0h	Reserved
49	F	0F00h	Capabilities
50	F	4000h	Capabilities
51-52	X	00000200h	Obsoleted
53	F	0007h	Words 88 and 70:64 valid
54	X	3FFFh	Obsolete - Number of logical cylinders (16383)
55	X	0010h	Obsolete - Number of logical heads (16)
56	X	003Fh	Obsolete - Number of logical sectors per track (63)
57-58	X	00FBFC10h	Obsolete

Word	F: Fixed V: Variable X: Both	Default Value	Description
59	F	0100h	Number of sectors transferred per interrupt on MULTIPLE commands
60-61	F	037DFF40h (32G) xxxxxxxh (64G)	Total number of user addressable sectors
62	X	0h	Obsolete
63	F	0007h	Multi-word DMA modes supported/selected
64	F	0003h	PIO modes supported
65	F	0078h	Minimum Multiword DMA transfer cycle time per word
66	F	0078h	Manufacturer's recommended Multiword DMA transfer cycle time
67	F	0078h	Minimum PIO transfer cycle time without flow control
68	F	0078h	Minimum PIO transfer cycle time with IORDY flow control
69-70	F	0h	Reserved
71-74	F	0h	Reserved for the IDENTIFY PACKET DEVICE command
75	F	0h	Queue depth
76	F	0002h	Serial SATA capabilities
77	F	0h	Reserved for future Serial ATA definition
78	F	0000h	Serial ATA features supported
79	V	0000H	Serial ATA features enabled
80	F	00F8h	Major Version Number
81	F	0021h	Minor Version Number
82	F	7429h	Command set supported
83	F	7008h	Command set supported
84	F	4000h	Command set/feature supported extension
85	V	7028h	Command set/feature enabled
86	V	3000h	Command set/feature enabled
87	V	4000h	Command set/feature default
88	V	007Fh	Ultra DMA Modes
89	F	0000h	Time required for security erase unit com

Word	F: Fixed V: Variable X: Both	Default Value	Description
90	F	0000h	Time required for Enhanced security erase completion
91	V	0h	Current advanced power management value
92	V	0000h	Master Password Revision Code
93	F	0h	Hardware reset result. The contents of the bits (12:0) of this word shall change only during the execution of a hardware reset.
94	V	0h	Vendor's recommended and actual acoustic management value
95	F	0h	Stream Minimum Request Size
96	V	0h	Streaming Transfer Time - DMA
97	V	0h	Streaming Access Latency - DMA and PIO
98-99	F	0h	Streaming Performance Granularity
100-103	V	xxxxxxxh (32G) xxxxxxxh (64G) xxxxxxxh (128G) xxxxxxxh (256G)	Maximum user LBA for 48-bit Address feature set
104	V	0h	Streaming Transfer Time - PIO
105	F	0h	Reserved
106	F	0h	Physical sector size/Logical sector size
107	F	0h	Inter-seek delay for ISO-7779 acoustic testing in microseconds
108-111	F	0h	Unique ID
112-115	F	0h	Reserved
116	V	0h	Reserved
117-118	F	0h	Words per logical Sector
119	F	0h	Supported settings
120	F	0h	Command set/Feature Enabled/Supported
121-126	F	0h	Reserved
127	F	0h	Removable Media Status Notification feature set support
128	V	0h	Security status

Word	F: Fixed V: Variable X: Both	Default Value	Description
129-159	X	0h	Vendor specific
160	F	0h	Compact Flash Association (CFA) power mode 1
161-175	X	0h	Reserved for assignment by the CFA
176-205	V	0h	Current media serial number
206-216	F	0h	Reserved
217	F	0h	Non-rotating media device
218-221	F	0h	Reserved
222	F	0h	Reserved
223-233	F	0h	Reserved
234	F	0h	Reserved
235	F	0h	Reserved
236-255	F	0h	Reserved
255	X	Varies	Integrity word (Checksum and Signature)

3.3 Device SMART Data

The following 512 bytes make up the device SMART data structure. Users can obtain the data using the “Read Data” command (D0h).

Word	F: Fixed V: Variable X: Both	Description
0 - 1	X	Revision code
2 – 361	X	Vendor specific
362	V	Off-line data collection status
363	X	Self-test execution status byte
364 - 365	V	Total time in seconds to complete off-line data collection activity
366	X	Vendor specific
367	F	Off-line data collection capability
368 – 369	F	SMART capability
370	F	Error logging capability
371	X	Vendor specific
372	F	Short self-test routine recommended polling time (in minutes)
373	F	Extended self-test routine recommended polling time (in minutes)
374	F	Conveyance self-test routine recommended polling time (in minutes)
375 - 385	R	Reserved
386 - 395	F	Firmware Version/Date Code
396 - 397	F	Number of initial invalid block (396 = MSB, 397 = LSB)
398 - 399	V	Number of run time bad block (398 = MSB, 399 = LSB)
400 - 406	F	
407 - 415	X	Vendor specific
416	F	Reserved

3.4 Mechanical Form Factor

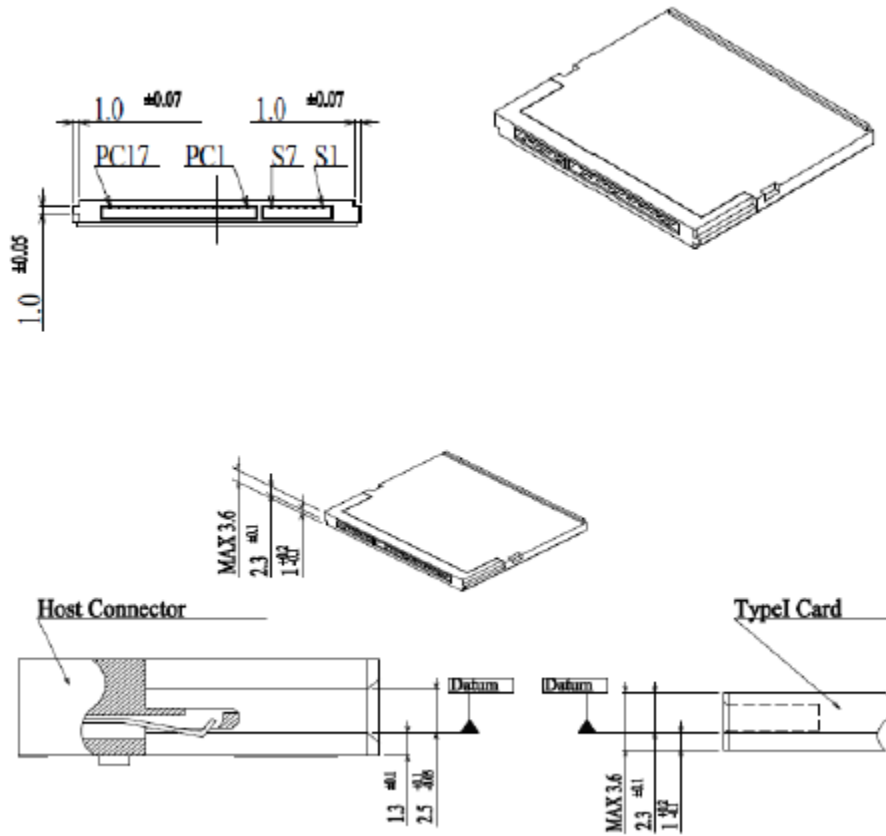


Figure 3. CFast Embedded Module Mechanical Description

3.5 Physical Dimensions

Table 8. CFast Embedded Module Physical Dimensions

Dimension	Measurement
Height	3.6mm
Width	42.8mm
Length	36.4mm

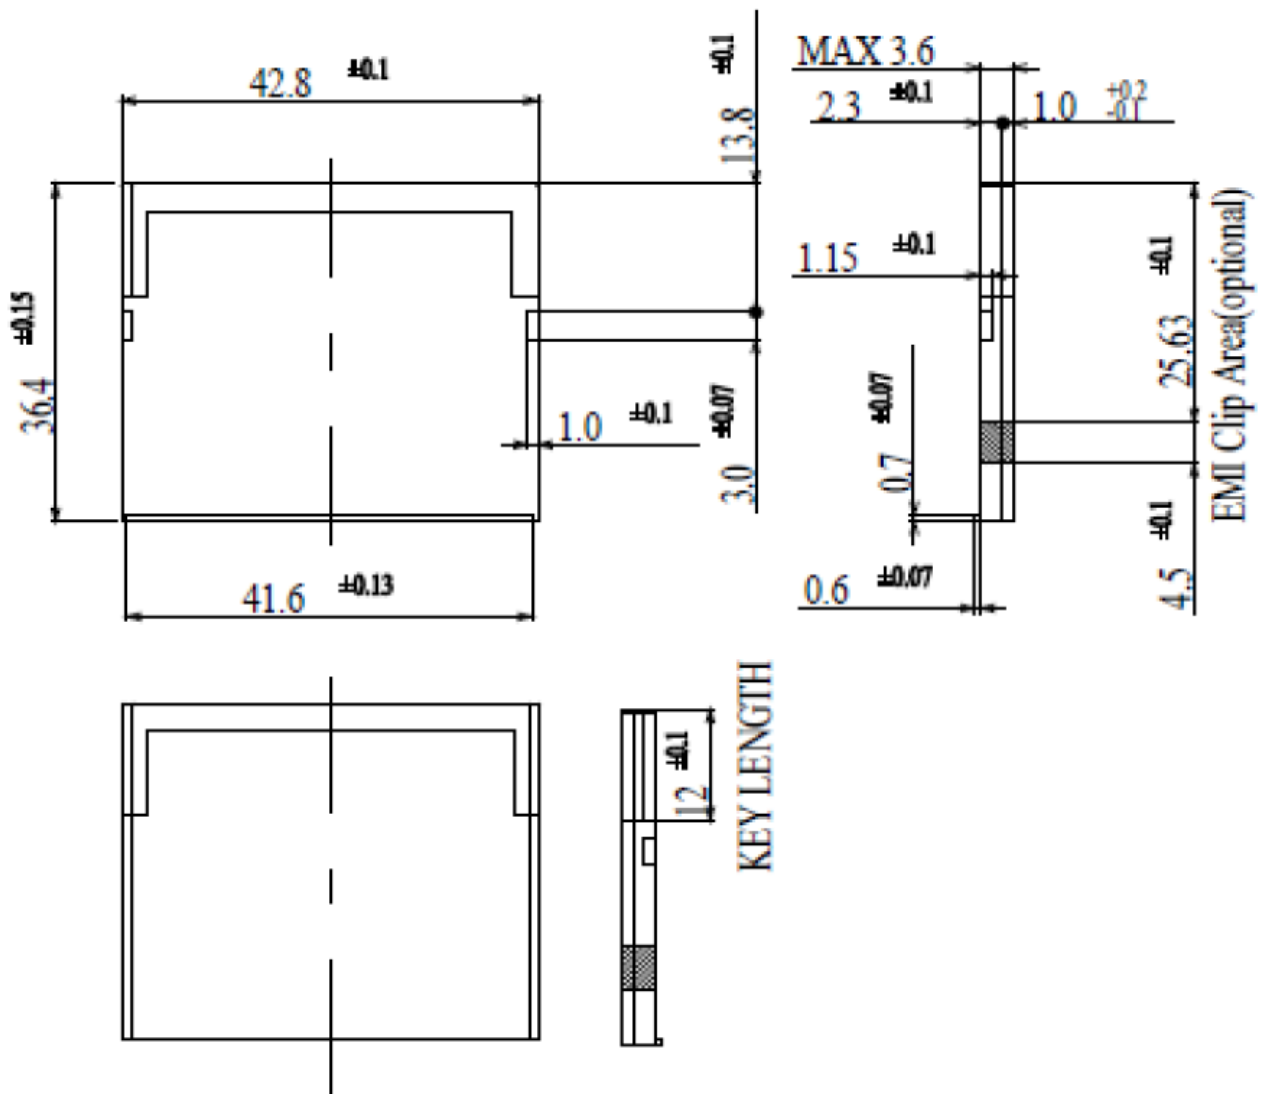


Figure 4 CFast Embedded Module Mechanical Dimensions