

PRODUCT PORTFOLIO

microSD/SDHC/SDXC Cards

microSD cards have been mainstream for years as storage for mobile phones, action cameras and other consumer devices. More recently, the small, lightweight and rugged form factor has become one of the most popular storage media for industrial and OEM applications as well. For handheld devices and other real estate-constrained designs, across a wide range of applications including inventory management, telecommunications, medical devices, power and energy, infotainment and transportation, Delkin Devices offers a full menu of microSD cards, allowing the best product selection to match any use model. Delkin microSD products have many additional benefits over standard retail consumer-grade cards, including BOM control, life cycle management and outstanding applications support.


Whether the application calls for a few Megabytes of storage to launch an application, or several Gigabytes to store video data, Delkin has the solution.

For the most demanding applications, in terms of environmental conditions, write-intensive workload or the mission-critical nature of the stored data, Delkin offers true industrial SD controllers, high endurance SLC NAND flash, full industrial temperature range and long life cycles.

For more cost sensitive designs, Delkin offers lines of MLC-based cards – the Utility family in standard (-25°C to +85°C) and Utility+ family offering full industrial (-40°C to +85°C) temperature ranges.

Regardless of the microSD product family, Delkin ensures consistent performance and host compatibility through managed configurations. Delkin locks the card configuration down to the specific controller, firmware and flash chips, with a change to any of these components dictating a new part number. When an unavoidable EOL occurs to any of these items, Delkin communicates the discontinuation in advance, providing the opportunity to place a last time buy as well as to qualify the replacement solution.

Additionally, since the Delkin Devices facility in Poway, California is the headquarters for our design, manufacturing and support teams, we can also provide customized microSD solutions. Options include pad printing, content or image loading, conformal coating or other mechanical modifications to meet a specific need. Contact us to ask how a card can be customized for your application.

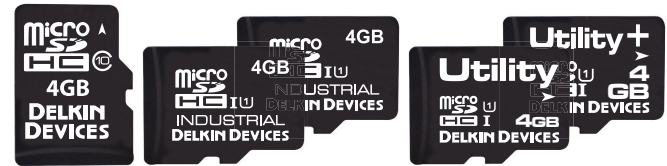

HIGHLIGHTS

Five microSD Product Families

- SLC and MLC Flash
- Commercial & Industrial Temp
- SD 3.0 & SD 2.0

Wide Range of Capacities from 128MB to 64GB

Support for SD and SPI Modes

Controlled BOM

Life Cycle Management

microSD/SDHC/SDXC CARD PRODUCT MATRIX



| SD Product Family | U331 Series | | U331A Series | | U300 Series | | Utility microSD | | Utility+ microSD | |
|-------------------------------------|--|--|--|--|---|--|--|----------------|--|--|
| Interface | SD 3.0, Class 10, UHS-I | | | | | | | | | |
| Connector | Standard microSD 8 pin | | | | | | | | | |
| Outline Dimensions | 11 x 15 x 1 mm | | | | | | | | | |
| Flash Type | SLC | | | | | MLC | | | | |
| Density Range | 128 MB - 2 GB (SD) 4 GB (SDHC) | | 128 MB - 2 GB (SD) 4 GB (SDHC) | | 512 MB - 2 GB (SD) 4 GB - 16 GB (SDHC) | | 4 GB - 32 GB (SDHC) 64 GB - 128 GB (SDXC) | | 4 GB - 32 GB (SDHC) 64 GB - 128 GB (SDXC) | |
| Data Retention | 10 years - up to 10% of P/E cycles 1 year - at end of life / 100% of cycles | | | | | 5 years - up to 10% of P/E cycles 1 year - at end of life / 100% of cycles | | | | |
| Endurance (Raw Flash Level) | 50,000 P/E cycles | | | | 60,000 P/E cycles | | 3,000 P/E Cycles | | | |
| Operating Temperature | -40°C to +85°C | | | | | -25°C to +85°C | | -40°C to +85°C | | |
| Storage Temperature | -40°C to +85°C | | | | -50°C to +100°C | | -40°C to +85°C | | | |
| Sequential Read Performance (MB/s) | up to 20 | | up to 22 | | up to 24 | | up to 95 | | | |
| Sequential Write Performance (MB/s) | up to 20 | | up to 22 | | up to 20 | | up to 90 | | | |
| MTBF | ≥ 2,000,000 hours (0 - 25°C) | | | | | ≥ 3,000,000 hours (0 - 30°C) | | | | |
| Shock* | 1,500 G for 0.5msec | | | | | | | | | |
| Vibration* | 20Hz ~80Hz/1.52mm displacement, 80Hz~2000Hz / 20G Acceleration | | | | | | | | | |
| Humidity | 5 - 95% RH, non-condensing | | | | | 95% RH under 40°C | | | | |
| Voltage | 2.7 - 3.6 V Normal | | | | | | | | | |
| Power Consumption | Read typically < 50 mA Write typically < 100 mA Idle typically < 500 uA | | | | | Read typically < 160 mA Write typically < 130 mA Idle typically < 300 uA | | | | |
| Features & Tools | Proven Power Fail Safety Sophisticated Wear Leveling & Bad Block Management Highest Endurance Longest Life Cycle | | | | | Robust Power Fail & Firmware Protection Sophisticated Wear Leveling & Bad Block Management SMART Data Reporting & Dashboard Limited Life Cycle Management Cost Effective | | | | |
| SMART Capability | CMD56, Libraries Available Delkin Dashboard (Windows) | | | | CMD56, Emulation Dashboard Avail Q316 | | CMD56, Libraries Available Delkin Dashboard (Windows) | | | |
| Part Numbers | 128MB: S312TLK7B-C1000-3 256MB: S325TLM7B-C1000-3 512MB: S351TLN7B-C1000-3 1GB: S30GTLN7B-C1000-3 2GB: S302TLN7B-C1000-3 4GB: S304TLN7B-U1000-3 All capacities include Embedded Mode to ensure efficient wear leveling regardless of operating system or file system used. Contact Delkin for other options | | 128MB: S312TLKCN-C1000-3 256MB: S325TLMCN-C1000-3 512MB: S351TLN7B-C1000-3 1GB: S30GTLN7B-C1000-3 2GB: S302TLN7B-C1000-3 4GB: S304TLN7B-U1000-3 All capacities include Embedded Mode to ensure efficient wear leveling regardless of operating system or file system used. Contact Delkin for other options | | 512MB: S351MMUAL-C1000-4 1GB: S30GMMUAL-C1000-4 2GB: S302MMZAL-C1000-4 4GB: S304MMZAL-U1000-4 8GB: S308MMZAL-U1000-4 16GB: S316MMZAL-U1000-4 Contact Delkin for other options | | 4GB: S404APY5Q-U1000-3 8GB: S408APG49-U1000-3 16GB: S416APG49-U3000-3 32GB: S432APG49-U3000-3 64GB: S464APG55-U3000-3 128GB: S41HAPGAC-U3000-3 Contact Delkin for other options, including pSLC configurations | | 4GB: S304APY5Q-U1000-3 8GB: S308APG49-U1000-3 16GB: S316APG49-U3000-3 32GB: S332APG49-U3000-3 64GB: S364APG55-U3000-3 128GB: S31HAPGAC-U3000-3 Contact Delkin for other options, including pSLC configurations | |